


KEY	01 	02 	04 Traffig y gwyriad Diverted Traffic	06 Traffig y gwyriad Diverted Traffic	08 Gwyrriad Diversion	10 FFORDD O'CH BLAEN AR GAU ROAD AHEAD CLOSED	12 Traffig y Gwyrriad Diverted Traffic	14 Traffig y gwyriad Diverted Traffic	16 FFORDD O'CH BLAEN AR GAU ROAD AHEAD CLOSED
1A Ffordd Ar Gau Yma --/Month/--- Am -- Ddiwrnod Road Closed Here --/Month/--- for -- Days --- to ---	FFORDD AR GAU ROAD CLOSED	03 DIWEDD y gwyriad Diversion ENDS	05 Traffig y gwyriad Diverted Traffic	07 Gwyrriad Diversion	09 Gwyrriad Diversion	11 Traffig y Gwyrriad Diverted Traffic	13 Traffig y Gwrrriad Diverted Traffic	15 FFORD O'CH BLAEN AR GAU MYNEDIAD I BRESWYLWYR YN UNIG ROAD AHEAD CLOSED RESIDENT ACCESS ONLY	17 FFORDD O'CH BLAEN AR GAU ROAD AHEAD CLOSED

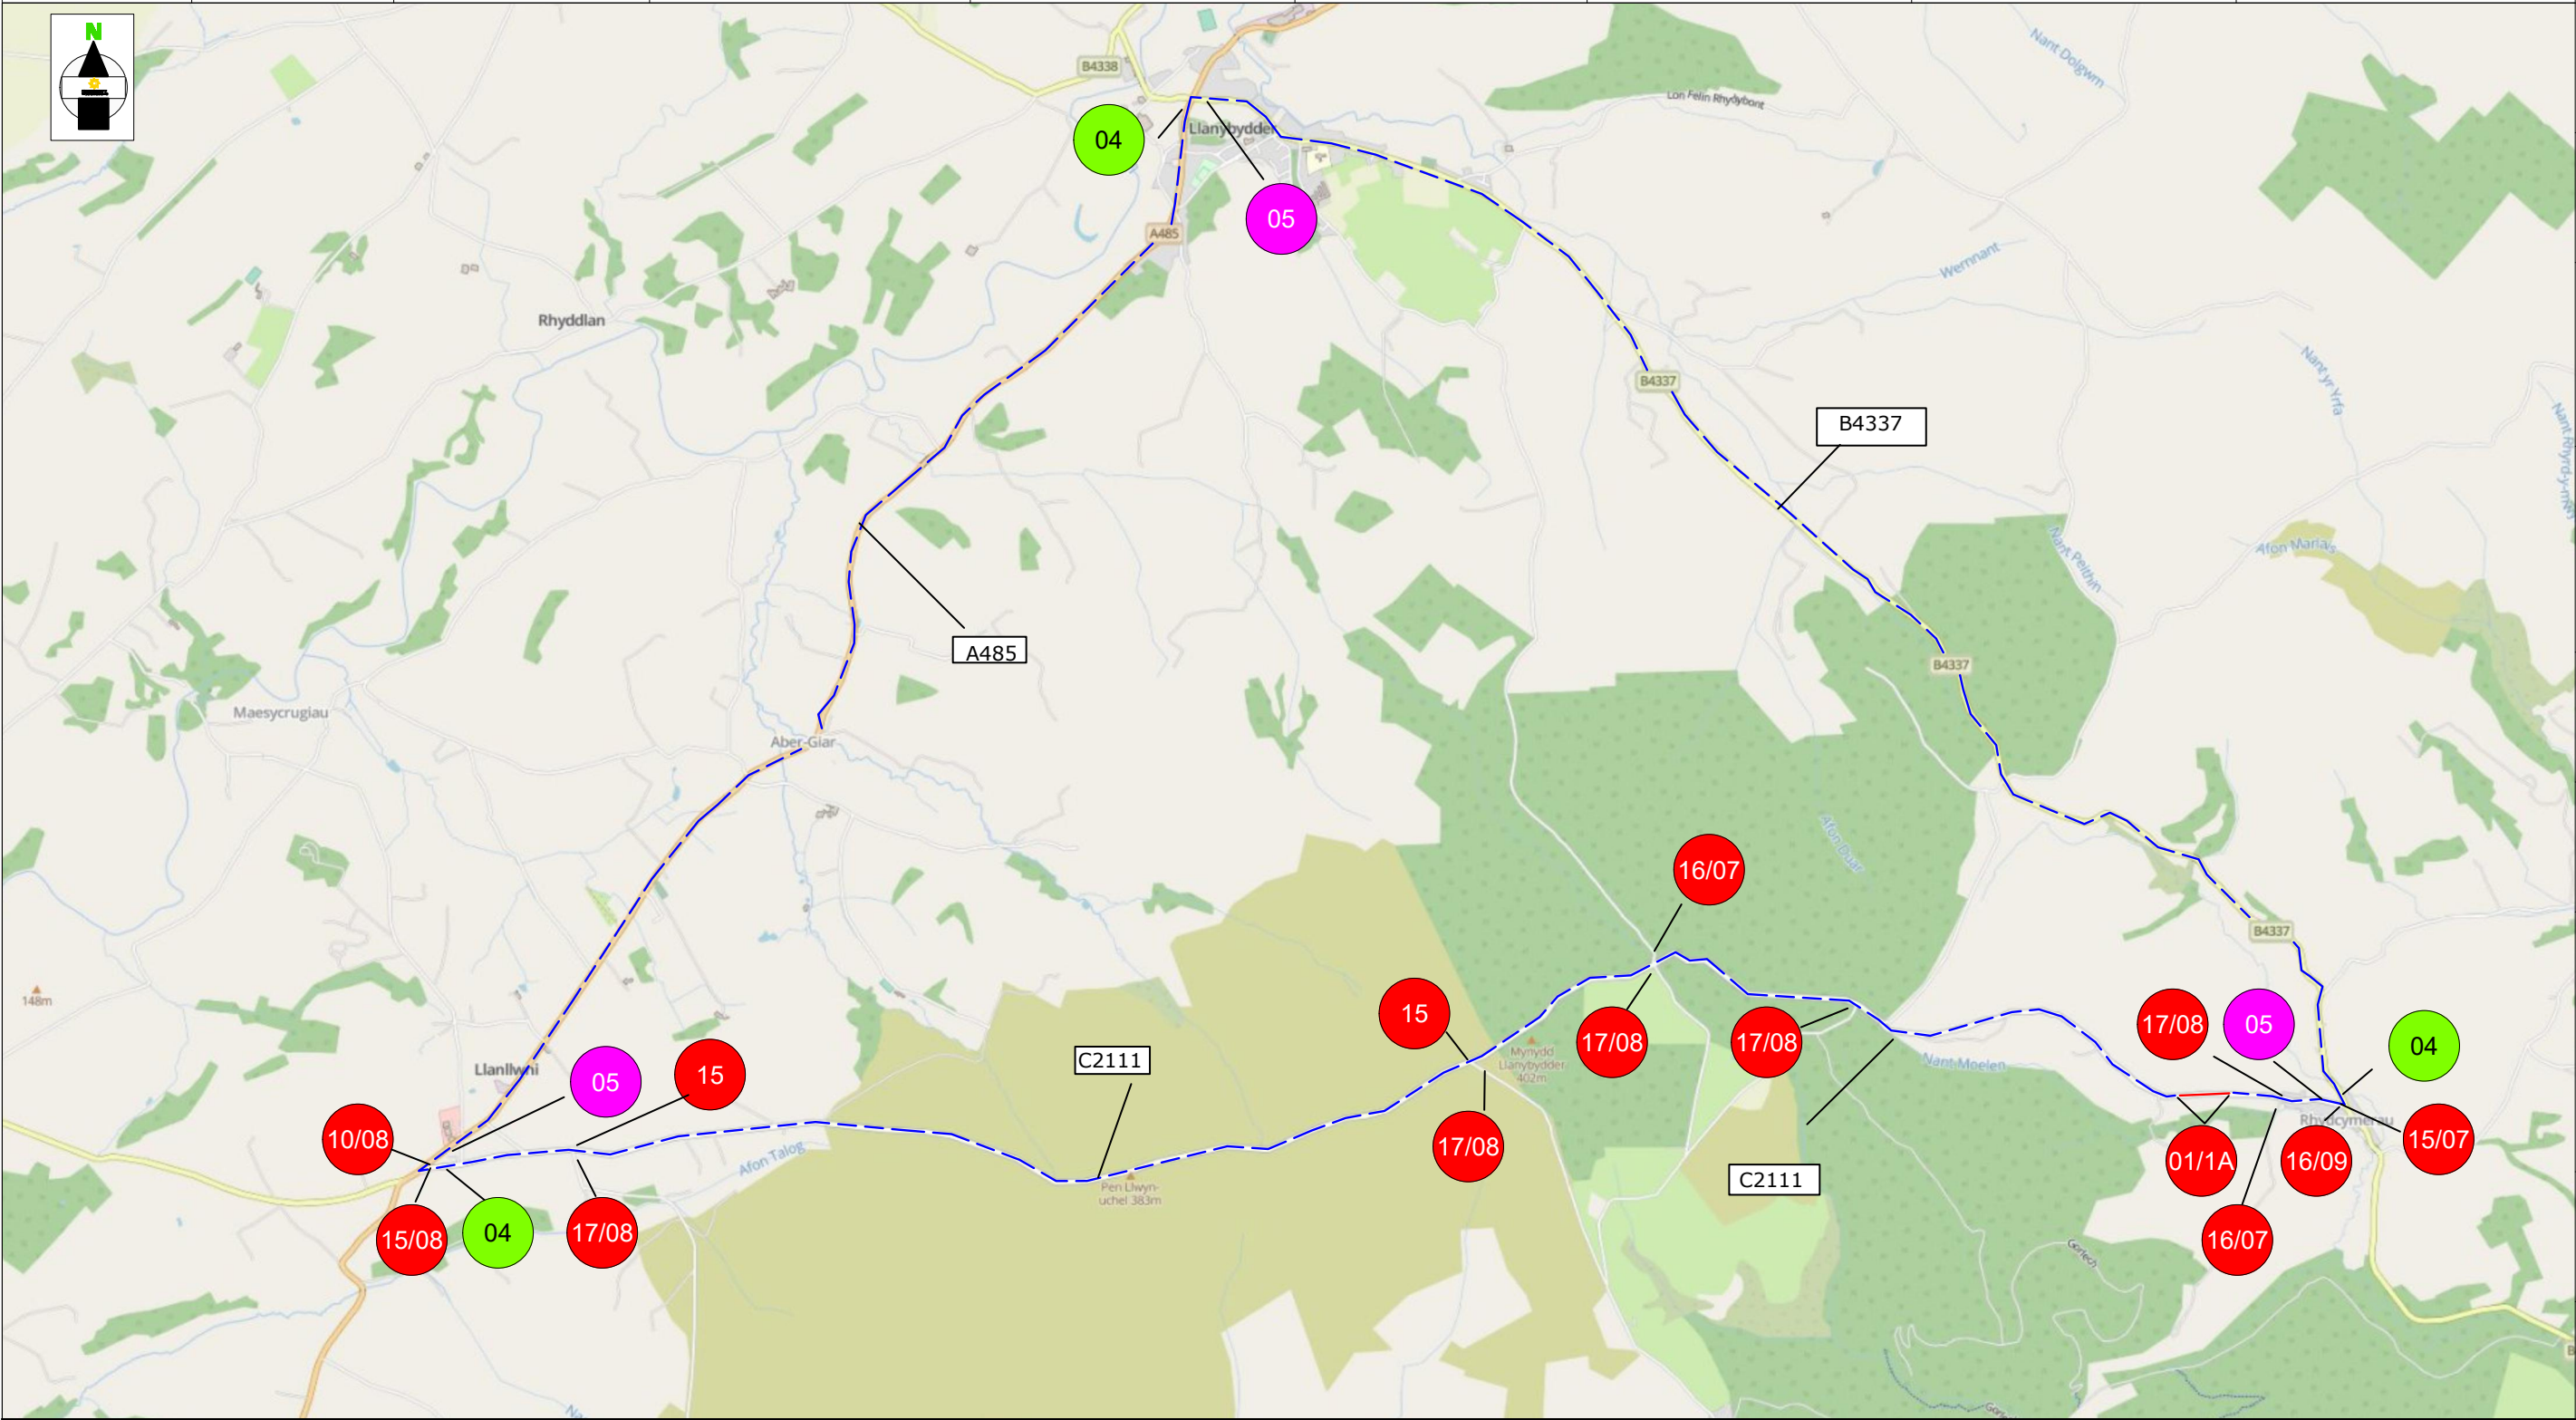

18 	19 	20 XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX	21 XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX
ROAD CLOSURE 			
DIVERSION ROUTE 			
03	CLOCKWISE ROUTE		
03	ANTI-CLOCKWISE ROUTE		
ROAD CLOSURE LENGTH	150 METRES		
ROAD CLOSURE WIDTH	3.6 METRES		

Contract No	220-S010429	Client: OPENREACH
Date	01/10/2024	Site Location / Drawing Title
Drawn by	RS/878	ROUTE TOWARDS DOLAU UCHAF
Approved By	220	FARM C2111 FROM RHYDCYMERAU
Purpose of works	TELECOM WORKS	TO LLANLLWNI LLANDEILO
Version Number	01	SA19 7RB
Amended By	xxxxxxxxx	
Amendment Date	xx/xx/xxxx	Scale
Sheet No	1 of 1	OS Licence No
		NOT TO SCALE
		000000000000

Note

- All equipment shall be approved and shall comply with the Department Of Transport specification MCE0111. This drawing does not show the normal road works signage that will be required as per Chapter 8.
- All signs to be in accordance with TSGRD 2002 and to minimum class retroreflective.
- Minimum height of lettering to be 60mm and sign boards to be 1000mm (750mm where appropriate).

The information in this drawing may not be copied or used by third parties without written consent from Sunbelt Rentals Ltd (Traffic Management).
This layout is for installation by NRSWA, Lantra 12A,12B,12C,12D qualified persons.
All works shall be in accordance with Safety at Street Works and Road Works, A Code of Practice 2013 & Chapter 8

TO BE INSTALLED AT CLOSURE POINTS

THIS DOCUMENT IS UNCONTROLLED WHEN PRINTED
The electronic version of this document is the approved and most current. Any printed version is uncontrolled and may not be current.

DETAIL AL

Manned Airlark system.
Notes:

- Minimal site traffic 25 - 30m air lock is sufficient. Extend airlark for larger work vehicle flow.
- Red lamps to be used on Nissen Barrier (all HE networks)

SUNBELT RENTALS
Sunbelt Rentals UK (Traffic Management)
Kemble Airfield Enterprise Park, Cirencester Road,
Kemble GL7 6BQ
Telephone: 0370 050 0792